

ZYH-E系列 (10A以下) EMI电源滤波器
ZYH-E series (below 10A) EMI filter

ZYH-E系列 (10A以下) :
ZYH-E Series below 10A)



ZYH-E系列 (10A以下) : ZYH-E Series below 10A)

特点和应用: Features and Applications

体积小、重量轻、价格低廉, 易于连接

Compact with competitible price, easy to mount

IEC标准插座式一体化滤波器

General purpose filter with IEC connector


可安装保险丝

Fuse can be installed

小型电子设备和电子测量仪器、模块电源

Mini-electronic equipments and measuring instruments, module power supply

订购信息: Ordering Information

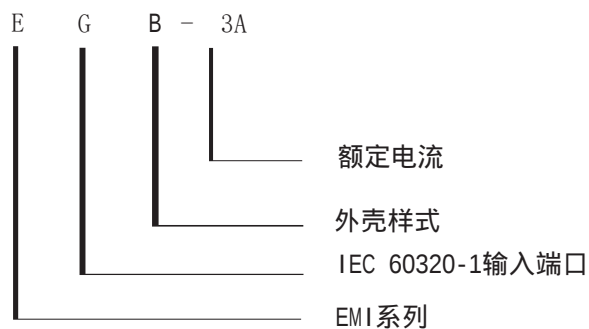

可选型号 Available Part Numbers

型号 Type ZYH-	额定电流范围 Rated Current (A)	绝缘电阻 Insulation Resistance	端接方式 Terminal
EI	0.5 - 6	500	入Input 出Output
EF	0.5 - 6	500	
EL	0.5 - 10	500	
EG	0.5 - 10	500	
EGB	0.5 - 10	500	

规格: Specifications

每条线路对地的最大泄漏电流:

Maximum leakage current each Line to Ground:


	EI	EF	EL	EG	EGB
@ 250 VAC					
50/60 Hz:	≤ 0.5mA	≤ 0.5mA	≤ 0.5mA	≤ 0.5mA	≤ 0.5mA

Hipot额定值 (一分钟):

Hipot rating (one minute):

线路对地:	1800VAC
Line to Ground:	
线对线:	1500VDC
Line to Line:	
工作电压:	250VAC
Rated Voltage (max.):	
工作频率:	50/60HZ
Operating Frequency:	
额定电流:	0.5-10A
Rated Current:	
气候类别:	25/085/21
Climatic Category:	

电路原理图Electrical Schematics

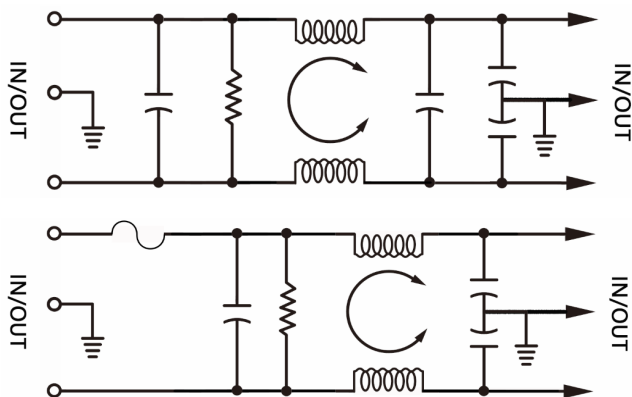


ZYH-E系列 (10A以下) EMI电源滤波器
ZYH-E series (below 10A) EMI filter


ZYH-E系列 (10A以下) : ZYH-E Series below 10A)

外壳样式 : Case Styles


EI外壳样式 : EI Case Styles

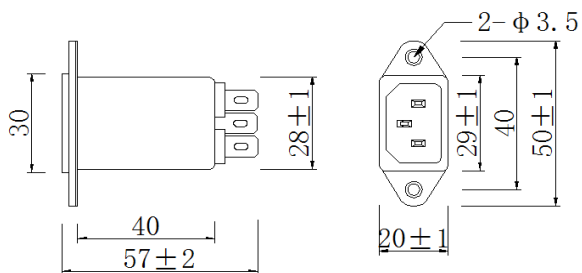


EF外壳样式 : EF Case Styles

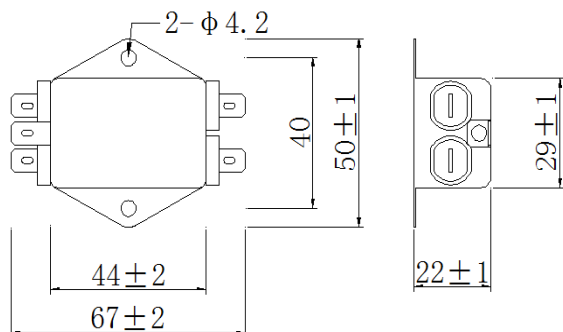


EL外壳样式 : EL Case Styles

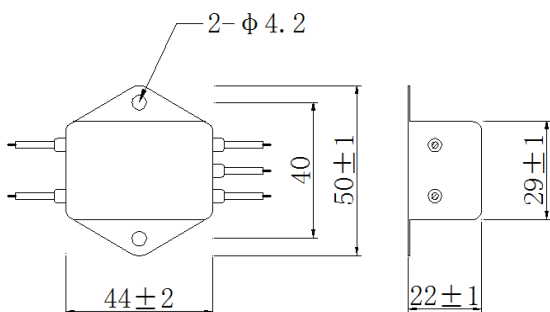

EG外壳样式 : EG Case Styles

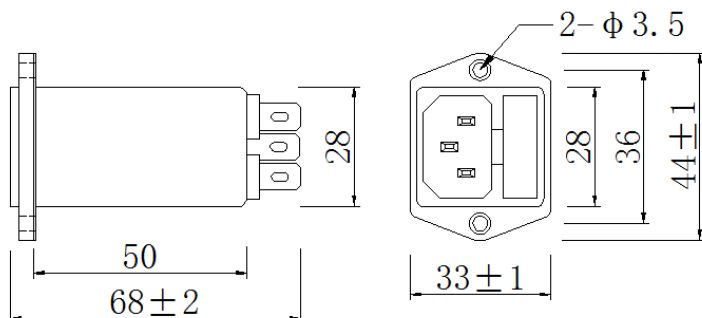

EGB外壳样式 : EGB Case Styles

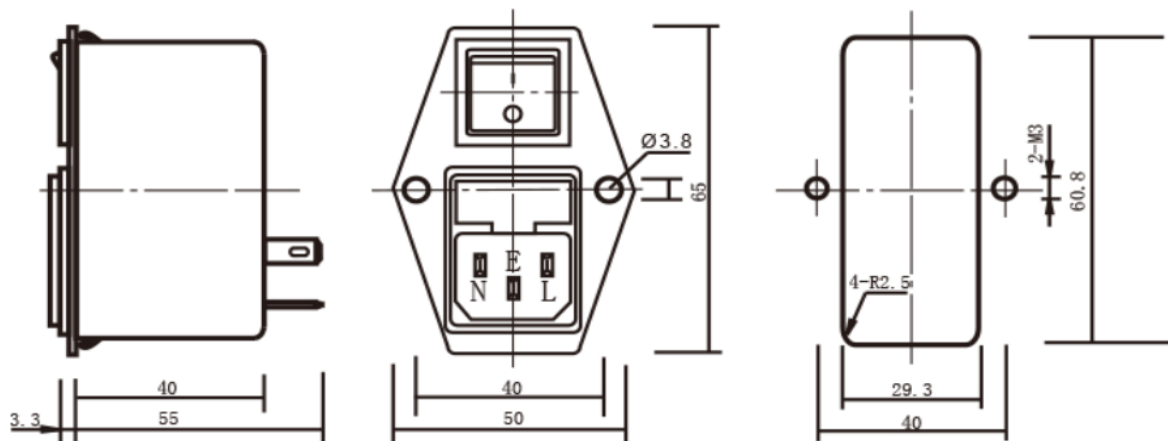

ZYH-E系列 (10A以下) EMI电源滤波器
ZYH-E series (below 10A) EMI filter

性能参数

Performance Data




典型插入损耗

Typical Insertion Loss

在封闭的50欧姆系统中测量

Measured in closed 50 Ohm system

—— 共模/不对称 (L-G)
Common Mode / Asymmetrical (L-G)
—— 差模/对称 (L-L)
Differential Mode / Symmetrical (L-L)

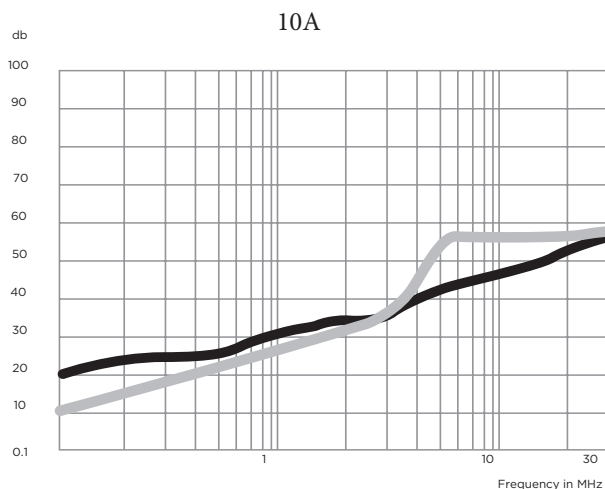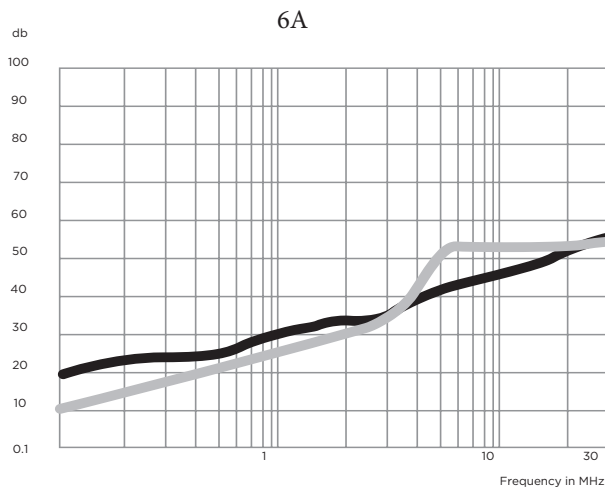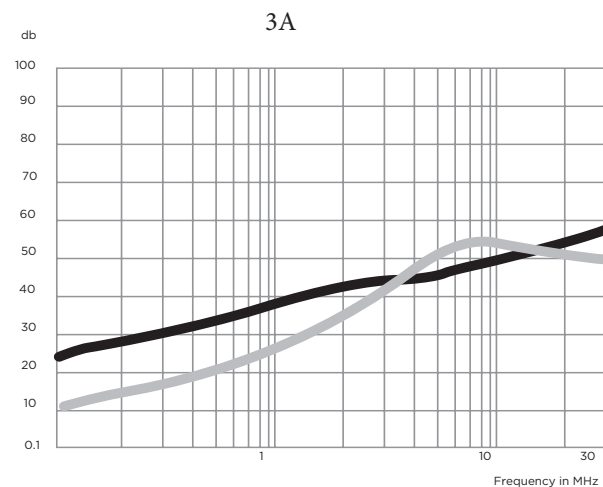

最小插入损耗 Minimum Insertion Loss

共模/不对称 (线对地)

Common Mode / Asymmetrical (Line to Ground)

差模/对称 (线对线)

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz					
	.15	.5	1	5	10	30
3A	01	51	91	03	63	05
6A	1	4	01	61	22	04
10A	1	4	01	61	22	04

Current Rating	Frequency – MHz					
	.15	.5	1	5	10	30
3A	1	21	41	52	83	44
6A	2	18	31	32	33	93
10A	3	18	31	32	33	93